

Uputstvo za transmiter temperature i vlage


RS-WS-I20-SMG

Karakteristike	Temperatura	Vlaga
Napajanje	10-30V DC	
Radna temeratura sonde	-40°C - +120°C	
Radna vlažnost sonde	0%RH - 100%RH	
Preciznost	±0.5°C (25°C)	±3%RH (60%RH, 25°C)
Radna temperatura i vlažnost transmitera	-40°C - +80°C (4-20mA)	0%RH - 100%RH (4-20mA)
Dugoročno održanje	≤0.1°C	≤1%RH
Odziv	≤25s (1m/s brzina vetra)	≤8s (1m/s brzina vetra)
Izlazni signal	4-20mA	

Povezivanje

	Boja žice	Značenje
Napajanje	Braon	+
	Crna	-
Izlaz	Plava	Signal temp. +
	Zelena	Signal temp. -
	Žuta	Signal vlage +
	Bela	Signač vlage -

Šema za povezivanje

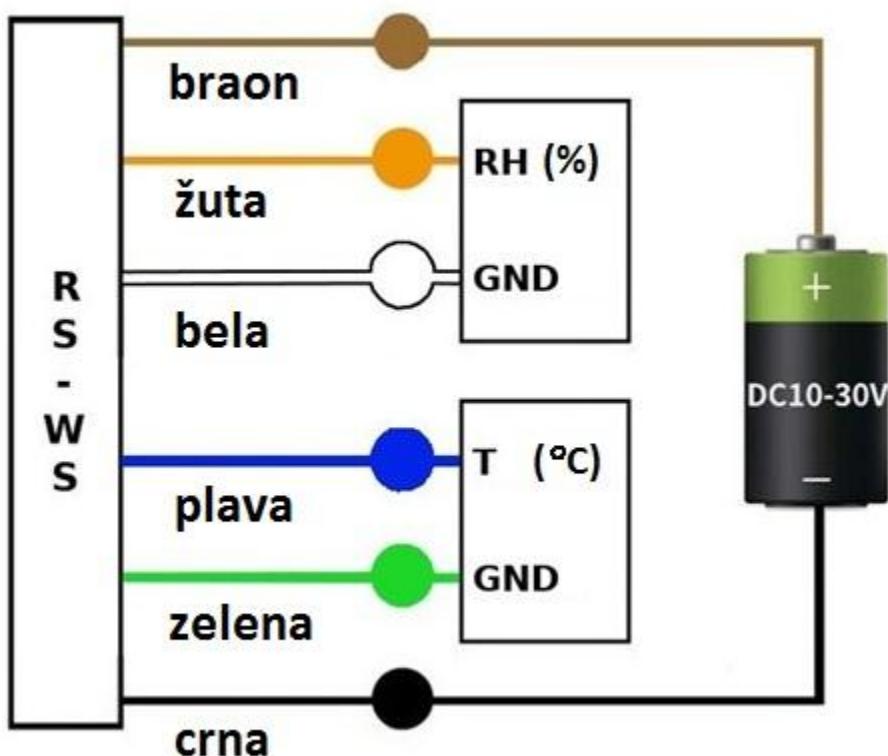

Dimenziije

